

LAB-068




60° Up Shroud
With Wired Knuckle
& LAP-002

Micro Module Ordered Separately



SPECIFICATIONS

Fixture Type	Fixture Components	Fixture Material	Fixture Style	Watts	Color Temperature	Finish
D (Directional)	4 (Integrated Modular)	B (Brass)	2 (UP)	3.5W 5.5W	27K (2700K) 30K (3000K)	A (Antiqued)

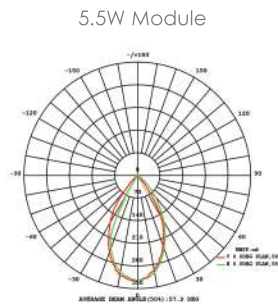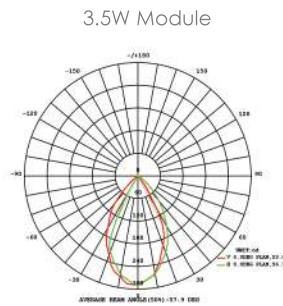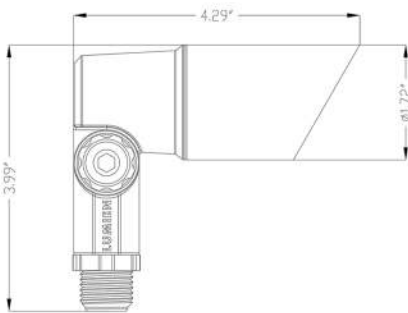

Construction: Brass
Finish: Antique Brush
Lead Wire: 6ft long
Mounting: LAP-002
Light Source: Modular LED
Wattage: 3.5 & 5.5W
Operating Voltage: 12-15V
Lumens: 248 & 335 LM
Beam Spread: 60°
Color Temperature: 2700K, 3000K

APPLICATION

Environment: Wet, Damp or Dry Area approved.
Installation: Mounts to our 12" Spike (LAP-001) or 8" Spike (LAP-002)

ACCESSORIES



M4B1-3.5W-27K-A



LAB-050



LAB-051



LAB-002

WARRANTY

Lifetime Warranty on the Housing,
10 Year Warranty on the LED Light Source

CERTIFICATION

UL Listed | File #E501872

Lumien Lighting reserves the right to modify the design of our products at any time and data listed on spec sheets is subject to change.