

Type:

Model:

SUNSET LOW-VOLTAGE DIMMER

ORDERING CODES:

501087

SPECIFICATIONS

HOUSING:

Aluminum

ELECTRICAL:

12-15 VAC, 10 Amps, 50-60 Hz

Max Load = 12V AC (DO NOT Exceed 10AMP Load)

Protected with a 20 AMP wedge fuse

Installs on the low voltage side of transformer

No Minimum Load Required

Dims Most Bulbs Incl. (Dimmable LEDs)

Extremely Smooth Trailing Edge Dimming

IP Rating:


IP20 (If you intend to use it in an outdoor setting, it MUST be placed inside a UL/ETL approved weatherproof box.)

WARRANTY: Three years



High efficiency digital dimmer.

DIMENSIONS:

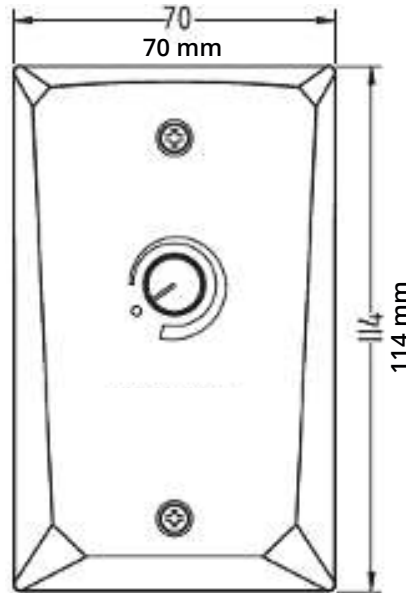

For best results:

1. Select the best AC transformer to provide 12 VAC power to the Dimmer and LED's.
2. Make sure the transformer is powered off when installing the 12 VAC LED dimmable products.
3. Turn on the transformer. Turn the dimmer dial switch to the lowest "on" position.
4. Using a small Phillips screwdriver, adjust the trim pot switch so the LED's are at their lowest illumination.
5. Once the lowest level of illumination is set, adjust the front dial to the desired level of brightness.

